

Chapter 12

Operating System Design

- 12.1 The nature of the design problem
- 12.2 Interface design
- 12.3 Implementation
- 12.4 Performance
- 12.5 Project management
- 12.6 Trends in operating system design

Paradigms (1)

```
main( )  
{  
    int ... ;  
  
    init( );  
    do_something( );  
    read(...);  
    do_something_else( );  
    write(...);  
    keep_going( );  
    exit(0);  
}
```

Algorithmic code

Paradigms (2)

```
main( )
{
    mess_t msg;

    init( );
    while (get_message(&msg)) {
        switch (msg.type) {
            case 1: ... ;
            case 2: ... ;
            case 3: ... ;
        }
    }
}
```

Event-driven code

Implementation


Layer

7	System call handler				
6	File system 1	...		File system m	
5	Virtual memory				
4	Driver 1	Driver 2	...		Driver n
3	Threads, thread scheduling, thread synchronization				
2	Interrupt handling, context switching, MMU				
1	Hide the low-level hardware				

One possible design for a modern layered operating system

Naming

External name: /usr/ast/books/mos2/Chap-12

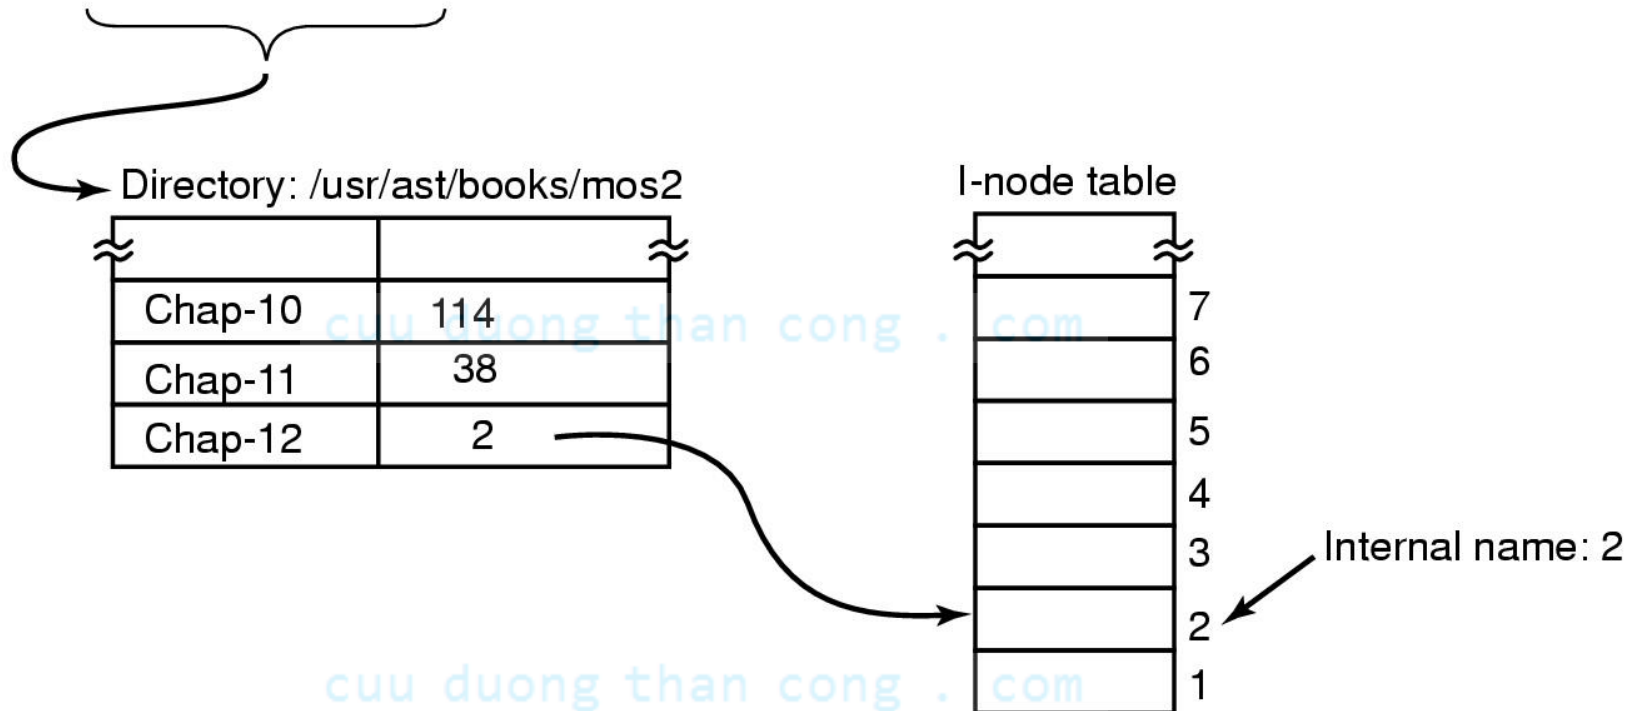

Directories are used to map external names
onto internal names

Static Versus Dynamic Structures

```
found = 0;
for (p = &proc_table[0]; p < &proc_table[PROC_TABLE_SIZE]; p++) {
    if (p->proc_pid == pid) {
        found = 1;
        break;
    }
}
```

Searching a static table for a pid

Hiding the Hardware (1)

```
#include "config.h"
init( )
{
    #if (CPU == PENTIUM)
        /* Pentium initialization here. */
    #endif

    #if (CPU == ULTRASPARC)
        /* UltraSPARC initialization here. */
    #endif
```

CPU-dependent conditional compilation

Hiding the Hardware (2)

```
#include "config.h"  
#if (WORD_LENGTH == 32)  
typedef int Register;  
#endif
```

```
#if (WORD_LENGTH == 64)  
typedef long Register;  
#endif
```

```
Register R0, R1, R2, R3;
```

Word-length dependent conditional compilation

Space-Time Trade-offs (1)

```
#define BYTE_SIZE 8
int bit_count(int byte)
{
    int i, count = 0;
    for (i = 0; i < BYTE_SIZE; i++)
        if ((byte >> i) & 1) count++;
    return(count);
}
```

/* A byte contains 8 bits */

/* Count the bits in a byte. */

/* loop over the bits in a byte */

/* if this bit is a 1, add to count */

/* return sum */

(a)

A procedure to count the 1 bits in a byte

Space-Time Trade-offs (2)

```
/*Macro to add up the bits in a byte and return the sum. */  
#define bit_count(b) (b&1) + ((b>>1)&1) + ((b>>2)&1) + ((b>>3)&1) + \  
                    ((b>>4)&1) + ((b>>5)&1) + ((b>>6)&1) + ((b>>7)&1)  
                    (b)
```

```
/*Macro to look up the bit count in a table. */  
char bits[256] = {0, 1, 1, 2, 1, 2, 2, 3, 1, 2, 2, 3, 2, 3, 3, 4, 1, 2, 2, 3, 2, 3, 3, ...};  
#define bit_count(b) (int) bits[b]  
                    (c)
```

(b) Macro to count the bytes

(c) Macro to look up the count

Space-Time Trade-offs (3)

24 Bits
↔

3,8,13	3,8,13	26,4,9	90,2,6
3,8,13	3,8,13	4,19,20	4,6,9
4,6,9	10,30,8	5,8,1	22,2,0
10,11,5	4,2,17	88,4,3	66,4,43

(a)

8 Bits
↔

7	7	2	6
7	7	3	4
4	5	10	0
8	9	2	11

(b)

24 Bits
↔

11	66,4,43
10	5,8,1
9	4,2,17
8	10,11,5
7	3,8,13
6	90,2,6
5	10,30,8
4	4,6,9
3	4,19,20
2	88,4,3
1	26,4,9
0	22,2,0

(c)

- (a) Part of an uncompressed image with 24 bits per pixel
- (b) Same part compressed with GIF, 8 bits per pixel
- (c) The color palate

Caching

Path	I-node number
/usr	6
/usr/ast	26
/usr/ast/mbox	60
/usr/ast/books	92
/usr/bal	45
/usr/bal/paper.ps	85


Part of an i-node cache

Software team Structure

Title	Duties
Chief programmer	Performs the architectural design and writes the code
Copilot	Helps the chief programmer and serves as a sounding board
Administrator	Manages the people, budget, space, equipment, reporting, etc.
Editor	Edits the documentation, which must be written by the chief programmer
Secretaries	The administrator and editor each need a secretary
Program clerk	Maintains the code and documentation archives
Toolsmith	Provides any tools the chief programmer needs
Tester	Tests the chief programmer's code
Language lawyer	Part timer who can advise the chief programmer on the language


Mills' proposal for populating a 10-person chief programmer team

The Role of Experience (1)

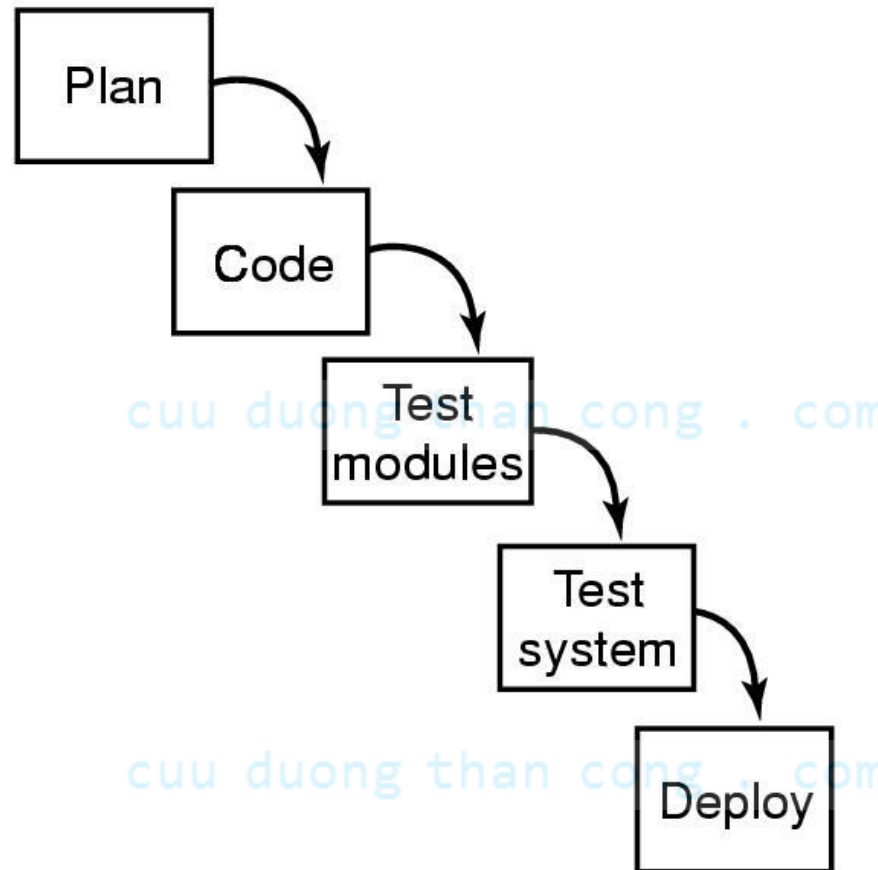

Traditional software design progresses in stages

The Role of Experience (2)

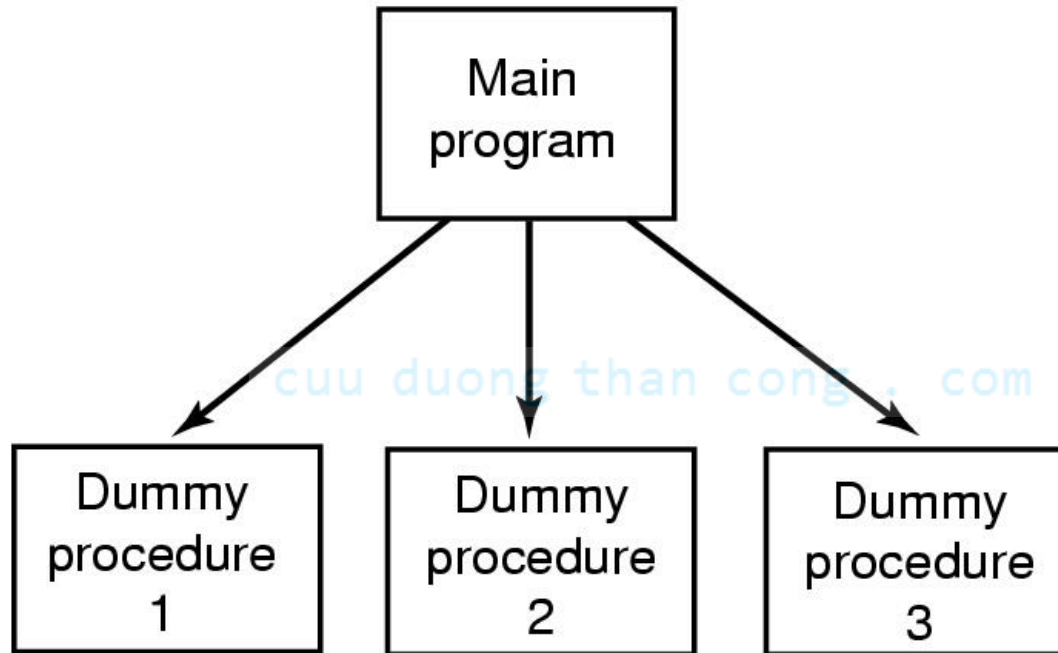

- Alternative design produces a working system
 - that does nothing starting on day 1